



VKK SECADORA



ENTRADA DE PIEZAS



COMPUERTA DE VACIADO



REJILLA TAMIZADO





CUADRO ELÉCTRICO



COLECTOR DE POLVO



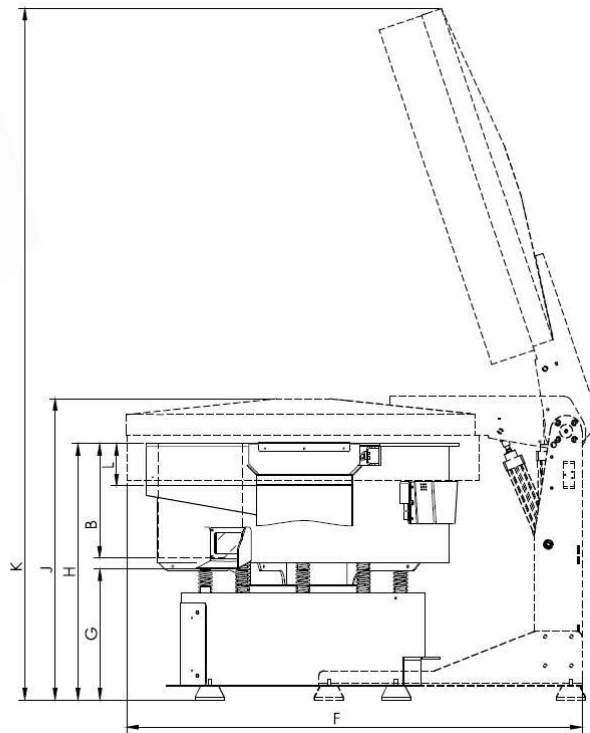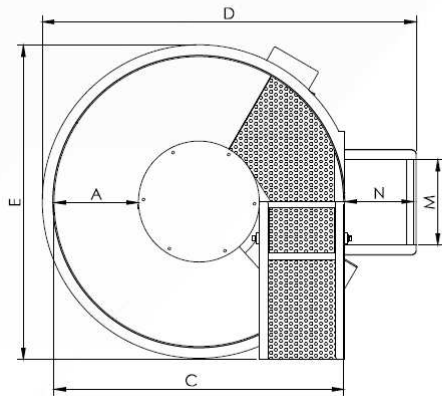

A	mm	265	320	360	440	500	560	620
B	mm	385	435	570	640	680	720	820
C	mm	890	1100	1260	1500	1680	1840	2000
D	mm	1190	1420	1590	1835	2150	2350	2520
E	mm	970	1200	1400	1625	1820	2000	2200
F	mm	1500	1740	1850	2100	2300	2600	2900
G	mm	440	500	510	470	490	520	550
H	mm	900	980	1150	1150	1240	1330	1420
J	mm	1060	1120	1160	1300	1440	1540	1600
K	mm	2400	2630	2850	3000	3250	3650	3850
L	mm	130	150	150	175	200	230	260
M	mm	360	360	400	500	580	640	800
N	mm	250	250	275	275	350	420	420

	VKK 100	VKK 200	VKK 400	VKK 600	VKK 900	VKK 1200	VKK 1600	MEDIDA
CAPACIDAD	112	213	405	647	903	1198	1585	Lt
VOLUMEN ÚTIL	70	160	310	490	680	905	1190	Lt
POTENCIA CALORÍFICA	1050	1800	3000	4500	6000	6000	7500	W
POTENCIA MOTOR	1.1	1.1	1.9	2.5	5	7	10	Kw
VOLTAJE	380/50	380/50	380/50	380/50	380/50	380/50	380/50	380/50
VELOCIDAD MOTOR	1500	1500	1500	1500	1500	1500	1500	rpm